EUROPA-LED

IP 66

LED | CE | EMC | EAC | ta -20°C min. | EVG | EVG DIMM | UV STABIL | 220-240V 50-60 Hz | 220-240V 0 Hz | EMERGENCY | IK 10 | HACCP | 5 years Warranty | nano TECHNOLOGY | 850°C PC

Application: Dustproof lighting fixture of new generation EUROPA-LED with splash water resistance is designed for workshops, warehouses,manufacturing areas and garages.

Ballast: EP – electronic 220-240 V/50-60 Hz AC, 220-240 V DC

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: Plastic material PC (polycarbonate), grey colour RAL 7035

Diffuser: PC (polycarbonate) opal

Fastening: Direct surface ceiling or wall mounting by means of two self-locking fastening brackets (standard equipment) or set of wall brackets - angle 45° , pole mounting via set of pole brackets, suspension by means of wire or cable suspenders.

Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm^2.

Standard equipment: Cable gland Pg13.5 for diameter of cable 7-12 mm and fastening brackets for direct fastening of lighting fixture to a mounting surface

Calculated lifetime – LED modules:

L80B10 ta30 – 70 000h
L70B10 ta30 – 100 000h

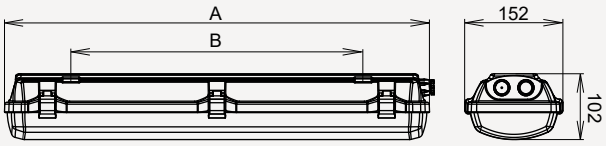

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A (mm)	Mounting spacing B (mm)	Weight (kg)
4000K								
055374	EUROPA-LED-1250-118-4K	1114	8	139	40	670	460	1,2
055375	EUROPA-LED-2500-218-4K	2228	16	139	40	670	460	1,2
055376	EUROPA-LED-5000-218-4K	4531	33	137	40	670	460	1,3
055373	EUROPA-LED-2600-136-4K	2278	17	134	45	1280	880	2,1
055372	EUROPA-LED-5100-236-4K	4557	33	138	40	1280	880	2,3
055377	EUROPA-LED-10000-236-4K	9063	66	137	40	1280	880	2,5
055371	EUROPA-LED-3850-158-4K	3418	25	137	40	1580	1000	2,7
055370	EUROPA-LED-7600-258-4K	6836	50	137	40	1580	1000	2,6
055378	EUROPA-LED-12550-258-4K	11343	80	142	35	1580	1000	3
055419 NSP	EUROPA-LED-16700-258-4K	14403	94	153	40	1580	1000	3
055443 NSP	EUROPA-LED-20000-258-4K	17110	115	149	40	1580	1000	3

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

EUROPA-LED



C0-C180 - - - - C90-C270

Accessories on request



Suspended mounting

051131 Cable suspension-EUROPA-2x (3m)

051099 Set of wall brackets - angle 45° EUROPA (2 pcs)

Suspended mounting

001721 Wire suspension EUROPA

051098 Pole bracket EUROPA (for Ø 50 mm)



001748 LAK Protective cage EUROPA 18W

001749 LAK Protective cage EUROPA 36W

001750 LAK Protective cage EUROPA 58W

008029 Cable gland PG 13.5 with nut HEAVY DUTY RAL 7004

008501 Sealing plug M20

Lighting fixture detail



On request

DIM – dimmable electronic ballast (DALI,DSI, 1-10V)
GESIS – possibility to equip lighting fixtures with connectors
NANO – lighting fixtures can be protected by a special nano-layer (hydrophobic, oleophobic or antibacterial protection)
1/3 F - single-phase or three phase through wiring connection, maximum diameter of wires 2.5 mm²
2.7K-6.5K - colour temperature

EM-1/3 - non-maintained emergency lighting
MULTI-1/3 - maintained emergency lighting
NSP - stainless steel clip
ADELS - possibility to equip lighting fixtures with a connector terminal block
NUP - stainless steel fastening bracket
NSPP - stainless steel clip and fastening bracket
II - insulation class II

Stadard order number	MULTI-1H	MULTI-3H	DALI	1F	3F	NSP	MULTI-1H-NSP	MULTI-3H-NSP	DALI-NSP
055374	055427	055424	055430	055374 1F	055374 3F	055374 NSP	055427 NSP	055424 NSP	055430 NSP
055375	055400	055403	055431	055375 1F	055375 3F	055375 NSP	055400 NSP	055403 NSP	055431 NSP
055376	X	X	055429	055376 1F	055376 3F	055376 NSP	X	X	055429 NSP
055373	055418	055425	055432	055373 1F	055373 3F	055373 NSP	055418 NSP	055425 NSP	055432 NSP
055372	055401	055404	055379	055372 1F	055372 3F	055372 NSP	055401 NSP	055404 NSP	055379 NSP
055377	055410	055411	055412	055377 1F	055377 3F	055377 NSP	055410 NSP	055411 NSP	055412 NSP
055371	055406	055407	055433	055371 1F	055371 3F	055371 NSP	055406 NSP	055407 NSP	055433 NSP
055370	055402	055405	055434	055370 1F	055370 3F	055370 NSP	055402 NSP	055405 NSP	055434 NSP
055378	055423*	055426*	055369	055378 1F	055378 3F	055378 NSP	055423 NSP*	055426 NSP*	055369 NSP
055419	X	X	X	055419 1F	055419 3F	055419 NSP	X	X	X

* declared for reduced ambient temperature ta 30°C

EM
055435
055414
055440
055441
055442
055413

EUROPEAN UNION
EUROPEAN REGIONAL DEVELOPMENT FUND
INVESTMENT IN YOUR FUTURE